

Installation Instructions



IP65

IK08

230VAC 50Hz




IMPORTANT

- DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING.
- THIS PRODUCT MUST BE EARTHED.
- THIS PRODUCT IS DESIGNED TO OPERATE OUTDOORS.
- THIS PRODUCT CONTAINS A LIGHT SOURCE OF ENERGY EFFICIENCY C TO F. THIS IS DEPENDANT ON PRODUCT DRIVE CURRENT, LED COLOUR TEMPERATURE & OPTIC.
- DO NOT STARE AT THE OPERATING LIGHT SOURCE.
- PERSONNEL TO WEAR PROTECTIVE SAFETY GLASSES COMPLIANT WITH EN166 1F/EN169-5 WHEN COMMISSIONING OR MAINTAINING THIS PRODUCT.
- BASIC INSULATION IS PROVIDED BETWEEN POWER & DALI.
- ALWAYS MAINTAIN BASIC INSULATION BETWEEN LOW VOLTAGE SUPPLY AND CONTROL.
- LEDS CONTAINED WITHIN THIS LUMINAIRE SHALL ONLY BE REPLACED BY THE MANUFACTURER, THEIR SERVICE AGENT OR SIMILAR QUALIFIED PERSON.
- THE LUMINAIRE SHOULD BE POSITIONED SO THAT PROLONGED STARING INTO THE LUMINAIRE AT A DISTANCE CLOSER THAN 2.7 METERS IS NOT EXPECTED.

PRODUCT DETAILS

	LUMINAIRE HEIGHT (mm) A	LUMINAIRE DIAMETER (mm) B	INTERNAL DIAMETER FOR COLUMN (mm) C	HEIGHT FROM TOP OF COLUMN (mm) D	WEIGHT (kg)	WINDAGE (m ²)
YORK	786	323	76	363	5.0	0.14
SALISBURY	778	500	76	363	5.4	0.16
WARWICK	786	345	76	363	5.2	0.15
WATERFORD	655	450	76	363	5.3	0.15

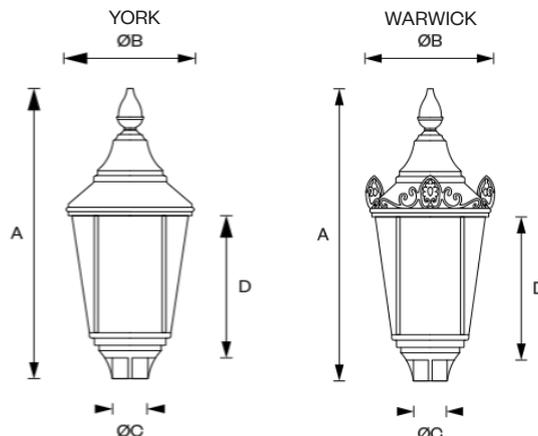


SUPPLIED PARTS

- LUMINAIRE x1 (YORK, SALISBURY, WARWICK OR WATERFORD)


TOOLS REQUIRED

Tools not supplied unless otherwise stated.



- 1 TORQUE WRENCH
8mm A/F
ALLEN KEY BIT



- 2 SLOTTED
SCREWDRIVER



- 3 POZI-HEAD
SCREWDRIVER

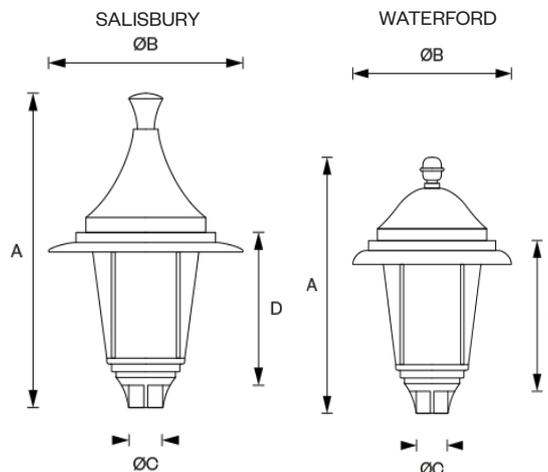


WIRING

 Wiring procedure should be carried out before mounting the luminaire on the column

1. Slide out Terminal Block Bracket




2. Unclip Terminal Block
3. Unscrew/open Cable Clamp

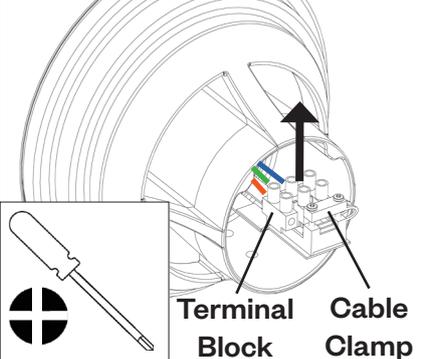


Terminal Block Cable Clamp

4. Wire Cable to Terminal Block

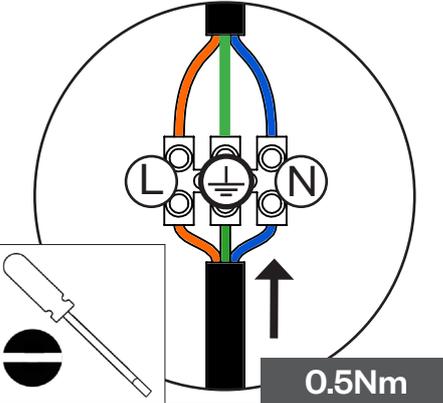


0.5Nm

4a. 5 Core Cable Wiring

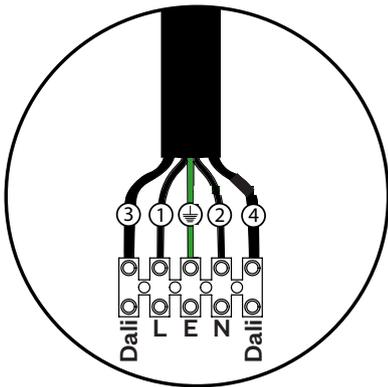

Dali 1 PE 2 Dali
3 4

5. Replace Terminal Block
6. Screw/close Cable Clamp

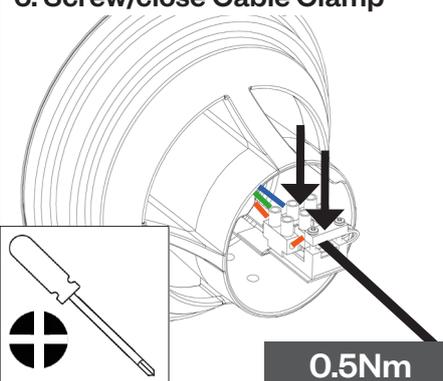

0.5Nm

MOUNTING

1. Place Luminaire on Column




 Take Care Not To Trap Cables

2. Ensure correct orientation



ROAD SIDE

3. Tighten Grubscrews

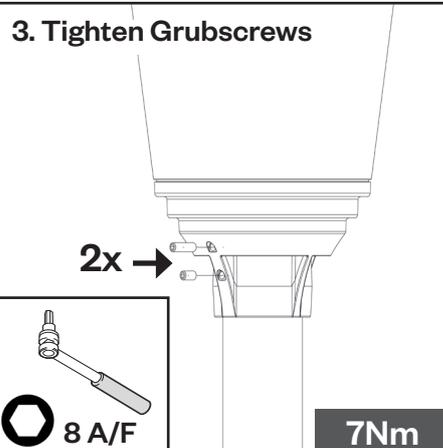

2x →

8 A/F 7Nm